
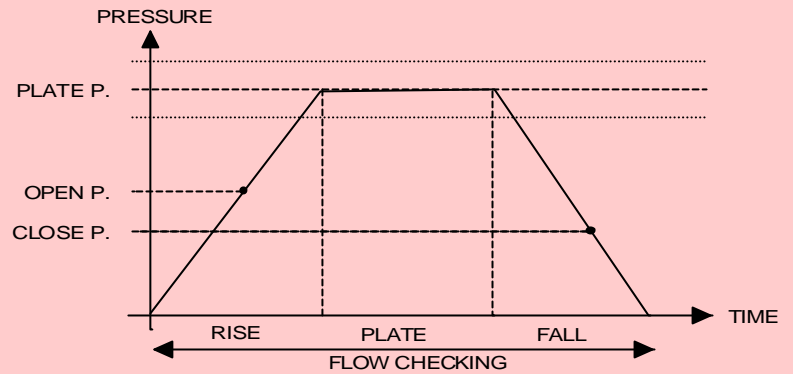


## Principle of measurement

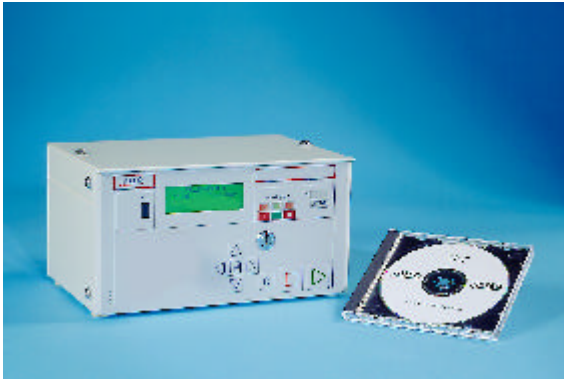


## Measurement Ranges

PRESSURE MEASUREMENT		
RANGE	ACCURACY <i>x = reading</i>	MAXIMUM RESOLUTION
100 mbar	± 1% de X + 0 digits	1 mbar
500 mbar	+ 1% de X + 0 digits	1 mbar
1 bar	+ 1% de X + 2 digits	1 mbar
4 bar	+ 1% de X + 0 digits	10 mbar
10 bar	+ 1% de X + 2 digits	10 mbar

FLOW MEASUREMENT		
RANGE l/h	ACCURACY <i>x = reading</i>	MAXIMUM RESOLUTION
4 000	± 3% de X + 3 digits	1
80	+ 3% de X + 3 digits	0.01
12	+ 3% de X + 3 digits	0.01

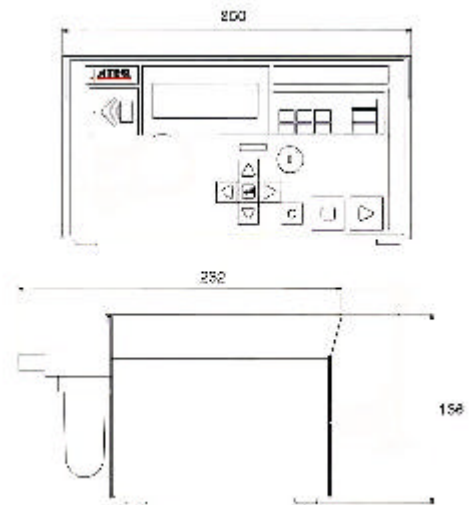

## Technical Specifications

- **Presentation**  
Weight: approximately 4 kg
- **Interface**  
Navigation keys  
4-line LCD display  
Results indicator lights
- **External electrical supply**  
Voltage: 24 V DC / 1.6 A  
Mains adaptater included 110 - 230 V AC
- **Air supply**  
Clean and dry air required  
Air quality standard to be applied (ISO 8573-1)
- **Temperature**  
Operating : + 10°C to +45°C  
Storage : 0°C to + 60°C

### Accessories

- Start/Reset remote control
- Printer
- Parameter storage module
- ATEQ software
- Master leak
- Filtration Kit
- Sealing connectors

*Please refer to ATEQ accessories list*

Specifications subject to change without notice



Head office:

15, rue des Dames - ZI des Dames - 78340 Les Clayes-Sous-Bois - France

☎ : + 33 1 30 80 10 20 - Fax : + 33 1 30 54 11 00 - e-mail : info@ateq.com

www.ateq.com